



AREC SERIES

ULTRA HIGH RIPPLE CURRENT TYPE

ALUMINUM SOLID ELECTROLYTIC CAPACITOR • THT type

High ripple current up to 6.6A at 100kHz/105°C

Low ESR up to 7mΩ at 100kHz/20°C

Low drift and stable electrical characteristics over lifetime

No liquid electrolyte ▲ No dry-out effect

Lifetime with 2000 hours at 105°C

SPECIFICATION

Item		Characteristics
Category Temperature Range		-55°C to +105°C
Rated Voltage Range	V_R	2.5V _{DC} to 16V _{DC}
Rated Capacitance Range	C_R	270μF to 2200μF
Capacitance Tolerance • At 20°C; 120Hz	ΔC	±20%
Surge Voltage • At 105°C	V_S	$V_S = 1.15 \times V_R$
Dissipation Factor • At 20°C; 120Hz	$\tan \delta$	0.1 max.
Leakage Current • At 20°C; after 2min.	I_{LEAK}	Shall not exceed values in the electrical characteristics
Endurance	Test	105°C ▲ 2000hrs ▲ V_R applied
	Appearance	No significant damage
	$\Delta C/C_R$	≤ ±20% of the initial value
	$\tan \delta$	≤ 150% of the initial specified value
	ESR	≤ 150% of the initial specified value
	I_{LEAK}	≤ The initial specified value
Damp Heat (Steady State)	Test	60°C ▲ 90 to 95% RH ▲ 1000hrs ▲ No voltage applied
	Appearance	No significant damage
	$\Delta C/C_R$	≤ ±20% of the initial value
	$\tan \delta$	≤ 150% of the initial specified value
	ESR	≤ 150% of the initial specified value
	I_{LEAK}	≤ The initial specified value
Surge Voltage	Test	1000 cycles and each one includes charge with V_S specified at 105°C for 0.5min through a protective resistor ($R=1k\Omega$) and discharge for 5.5min.
	Appearance	No significant damage
	$\Delta C/C_R$	≤ ±20% of the initial value
	$\tan \delta$	≤ 150% of the initial specified value
	ESR	≤ 150% of the initial specified value
	I_{LEAK}	≤ The initial specified value

ELECTRICAL CHARACTERISTICS

V _{R DC} (V)	C _R (μF)	Size Code	Dimensions (mm)				I _{LEAK} 20°C 2min (μA)	ESR 20°C 100kHz (mΩ)	I _R 105°C 100kHz (mA)	Part Number ^{Note 1}
			D	L	P	Ød				
2.5	560	06X8	6.3	8	2.5	0.6	500	7	5000	2R5AREC561M06X8T
	560	08X8	8	8	3.5	0.6	500	7	6100	2R5AREC561M08X8T
	820	06X8	6.3	8	2.5	0.6	500	7	5000	2R5AREC821M06X8T
	820	08X8	8	8	3.5	0.6	500	7	6100	2R5AREC821M08X8T
	1000	08X8	8	8	3.5	0.6	500	7	6100	2R5AREC102M08X8T
	1200	08X8	8	8	3.5	0.6	600	7	6100	2R5AREC122M08X8T
	1500	08A2	8	12	3.5	0.6	750	7	6100	2R5AREC152M08A2T
	1500	10A2	10	12	5	0.6	750	7	6640	2R5AREC152M10A2T
	2200	10A2	10	12	5	0.6	1100	7	6640	2R5AREC222M10A2T
4	560	08X8	8	8	3.5	0.6	500	7	6100	4R0AREC561M08X8T
	1200	08X8	8	8	3.5	0.6	960	7	6100	4R0AREC122M08X8T
6.3	470	06X8	6.3	8	2.5	0.6	592	8	4700	6R3AREC471M06X8T
	470	08X8	8	8	3.5	0.6	592	8	5700	6R3AREC471M08X8T
	560	06X8	6.3	8	2.5	0.6	705	8	4700	6R3AREC561M06X8T
	560	08X8	8	8	3.5	0.6	705	8	5700	6R3AREC561M08X8T
	820	06X8	6.3	8	2.5	0.6	1033	8	4700	6R3AREC821M06X8T
	820	08X8	8	8	3.5	0.6	1033	8	5700	6R3AREC821M08X8T
	1000	10A2	10	12	5	0.6	1260	7	6640	6R3AREC102M10A2T
	1500	10A2	10	12	5	0.6	1890	7	6640	6R3AREC152M10A2T
16	270	08X8	8	8	3.5	0.6	864	10	5000	160AREC271M08X8T
	270	08A2	8	12	3.5	0.6	864	10	5230	160AREC271M08A2T
	330	08X8	8	8	3.5	0.6	1056	10	5000	160AREC331M08X8T
	470	08A2	8	12	3.5	0.6	1505	10	5230	160AREC471M08A2T
	680	10A2	10	12	5	0.6	2176	10	6100	160AREC681M10A2T
	820	10A2	10	12	5	0.6	2624	10	6100	160AREC821M10A2T

Notes

1 Part number shows the standard Tape/Ammo version

APPLICATIONS

Input/Output Filter in DC/DC Converter	High Frequency Applications	Equipment with High Expected Life	Server & Industrial PC	Voltage Stabilizing in LED Panels
				

REFERENCE DATA ▲ 6R3AREC821M08X8T ▲ 820 μ F ▲ 6.3V ▲ 8.0 x 8.0mm

Fig. 1 • Frequency Characteristics of ESR & |Z|

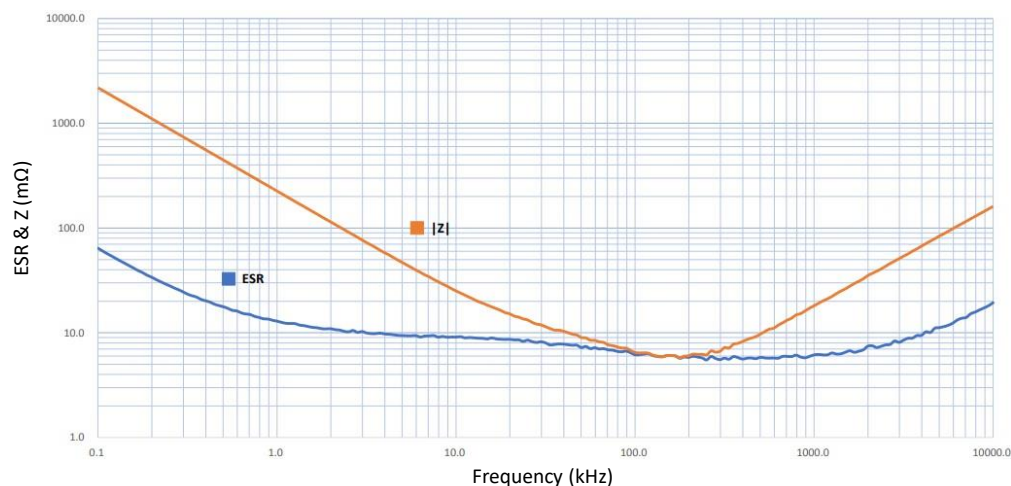


Fig. 2 • Frequency Characteristics of C (μ F)


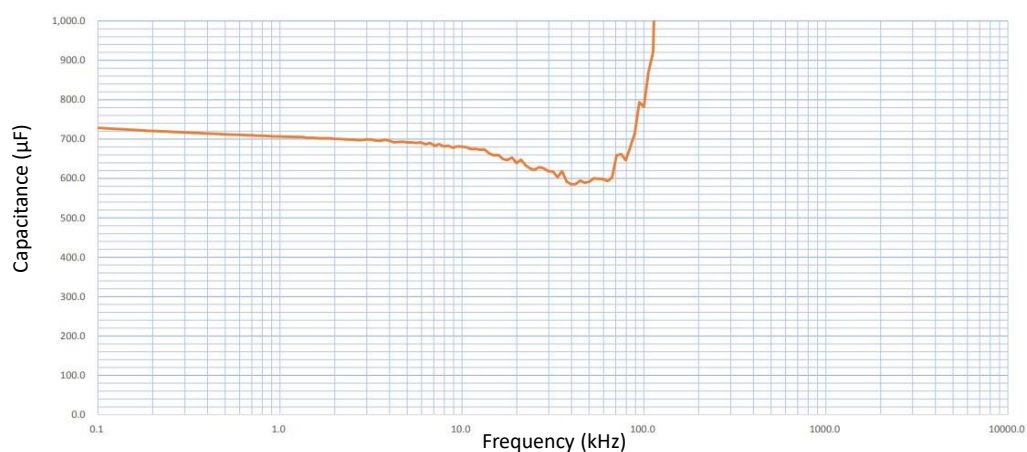


Fig. 3 • Frequency Characteristics of ESL (nH)

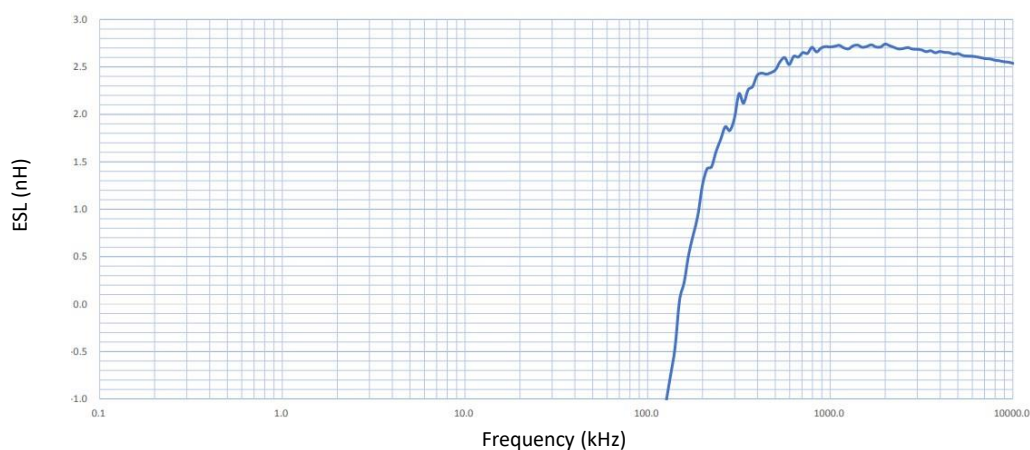


FREQUENCY CORRECTION FACTOR

Frequency Correction Factor of Permissible Ripple Current

Frequency	$120\text{Hz} \leq f < 1\text{kHz}$	$1\text{kHz} \leq f < 10\text{kHz}$	$10\text{kHz} \leq f < 50\text{kHz}$	$50\text{kHz} \leq f < 100\text{kHz}$	$100\text{kHz} \leq f < 500\text{kHz}$
Coefficient	0.05	0.3	0.7	0.85	1

PACKAGE OUTLINE ▲ All dimensions in mm

Dimensions

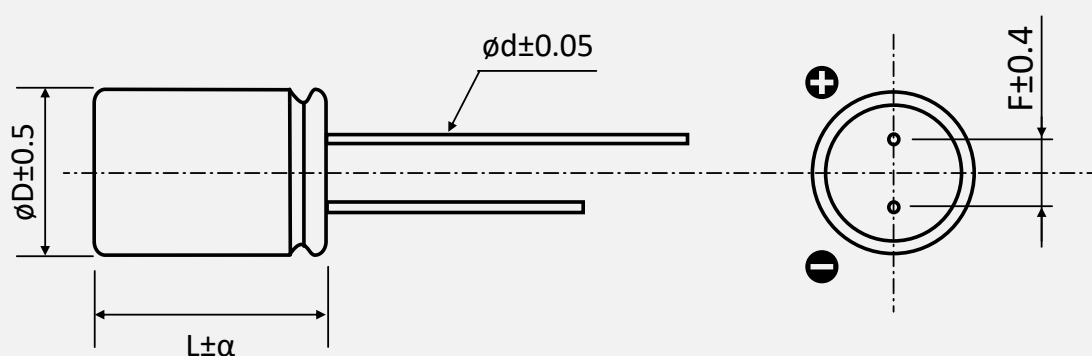

Size Code	$\varnothing D \pm 0.5 \text{ max.}$	L	α	$\varnothing d \pm 0.05$	$F \pm 0.4$
06X8	6.3	8.0	-0.5 to +1.0	0.60	2.5
08X8	8.0	8.0	-0.5 to +1.0	0.60	3.5
08A2	8.0	12.0	-0.5 to +1.0	0.60	3.5
10A2	10.0	12.0	-0.5 to +1.0	0.60	5.0

PRODUCT CODE


Example: AREC series ▲ 560μF ▲ 6.3V_{DC} ▲ ±20% ▲ D=6.3mm ▲ L=8mm ▲ F=2.5mm ▲ Tape/Ammo

6R3		AREC		561		M		06X8		T	
Rated Voltage (V _{DC})		Series		Capacitance Code ^{Note 1} (μF)		Capacitance Tolerance (%)		Package Code		Packaging Type	
Code	VDC	Code	Series	Code	μF	Code	Tol.	Code	D x L	Code	Type
2R5	2.5	AREC	AREC	271	270	M	±20	06X8	6.3 x 8.0	Blank T	Bulk Tape/Ammo
4R0	4.0			821	820			08X8	8.0 x 8.0		
6R3	6.3			102	1000			08A2	8.0 x 12.0		
160	16.0			152	1500			10A2	10.0 x 12.0		
				222	2200						

Note:

- Capacitance code expressed in μF. The first two digits represent significant figures. The last digit specifies the total number of zeros to be added.

PRODUCT MARKING

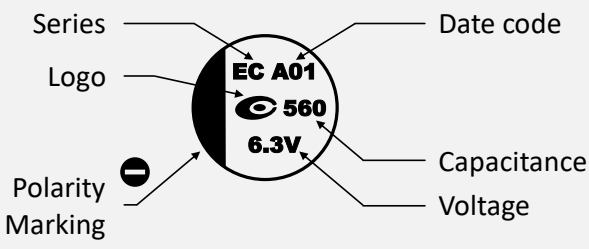Marking	Details	
	Marking	Description
	Logo	Manufacturer Logo
	Series	EC = AREC
	Date code	See date code table
	Capacitance	560 = 560μF
	Voltage	6.3V = 6.3V
		Polarity (-) marking

DATE CODE

Example:


Date code

A01: A01 = 1st week of 2020

A		01	
Year		Week	
A	2019	01	1 st
B	2020	02	2 nd
...	...	...	...
Z	2030	53	53 rd


TAPING SPECIFICATION ▲ THT TYPE

Dimensions in mm

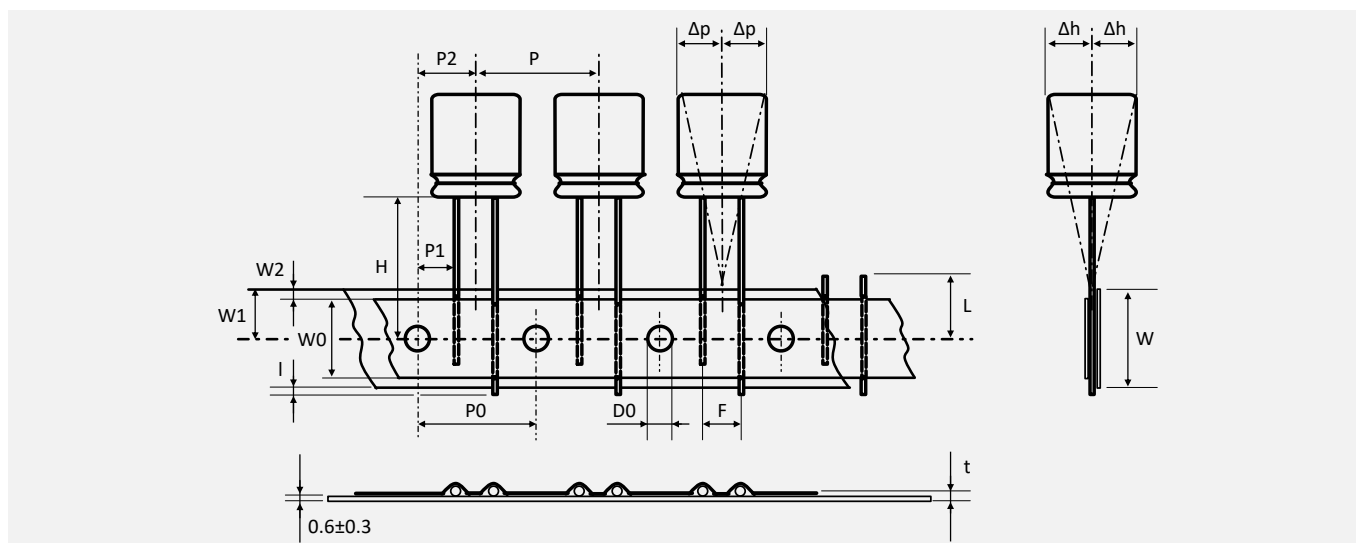




Size Code	F	P	P0	P1	P2	Δp	Δh	W	W0	W1	W2	H	$\phi D0$	t	I	L
Tolerance	$\begin{matrix} +0.8 \\ -0.2 \end{matrix}$	± 1.0	± 0.2	± 0.5	± 1.0	± 1.0	± 1.0	± 0.5	Min	± 0.5	Max	± 0.75	± 0.2	± 0.3	Max	max
06X8	2.5	12.7	12.7	5.1	6.35	0	0	18	9.5	9	2.5	18.5	4	0.6	0	11
08X8	3.5	12.7	12.7	4.6	6.35	0	0	18	9.5	9	2.5	18.5	4	0.6	0	11
08A2	3.5	12.7	12.7	4.6	6.35	0	0	18	9.5	9	2.5	18.5	4	0.6	0	11
10A2	5	12.7	12.7	3.85	6.35	0	0	18	9.5	9	2.5	18.5	4	0.6	0	11

AMMO PACKAGING QUANTITIES ▲ THT TYPE

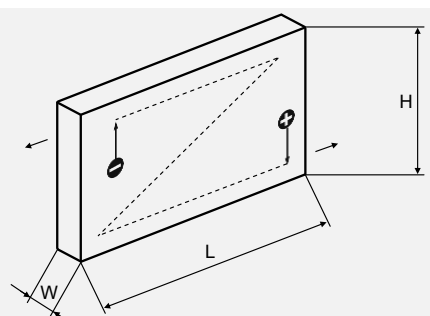Carton	Diameter (mm)	Length (mm)	Size Code	L max. (mm)	W max. (mm)	H max. (mm)	Qty per carton (pcs)
	$\phi 6.3$	8.0	06X8	335	42	260	2000
	$\phi 8.0$	8.0	08X8	335	42	260	1200
	$\phi 8.0$	12.0	08A2	335	45	260	1200
	$\phi 10.0$	12.0	10A2	335	45	260	650

BULK PACKAGING ▲ THT TYPE

Code	Capacitor Dimensions		Quantity / Bag	Quantity / Inner Box		Quantity outer box	
	ØD	L					
06X8	6.3	8.0	500 pcs	6 bags	3 000 pcs	5 inner boxes	15 000 pcs
08X8	8.0	8.0	500 pcs	4 bags	2 000 pcs	5 inner boxes	10 000 pcs
08A2	8.0	12.0	400 pcs	4 bags	1 600 pcs	5 inner boxes	8 000 pcs
10A2	10.0	12.0	300 pcs	4 bags	1 200 pcs	5 inner boxes	6 000 pcs

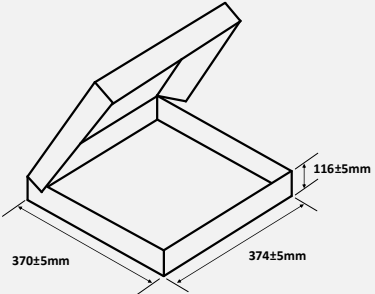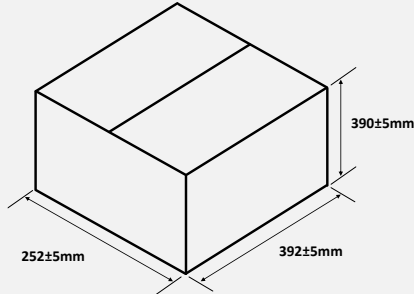Bag	Inner Box	Outer Carton
		
Label content Size L x W = 70mm x 50mm P/N: Customer part number R-ID: CCF1001290001 CCF: Fix 10: e.g., 2010 01: e.g., January 29: e.g., Day 29th 0001: Running number DESC: Customer specification SPEC: Manufacturer part number COO: Country of origin MAKER: Manufacturer VENDOR: Manufacturer DC: Date code LOT/NO: Production lot	Label on the inner box Size L x W = 70mm x 35mm P/N: Customer part number DESC: Customer specification SPEC: Manufacturer part number COO: Country of origin QTY: Quantity (pcs) MAKER: Manufacturer VENDOR: Manufacturer DC: Date code LOT/NO: Production lot	Label on the outer carton Size L x W = 100mm x 90mm CUSTOMER: Customer name P/O: Customer order number P/N: Customer part number DESCRIPTION: Manufacturer part number QTY: Quantity (pcs) and shipping date COO: Country of origin


BULK PACKAGING ▲ THT TYPE WITH CUTTED LEADS ^{NOTE 1}

Code	Capacitor Dimensions		Quantity / Bag	Quantity / Inner Box		Quantity outer box	
	ØD	L					
06X8	6.3	8.0	500 pcs	8 bags	4 000 pcs	5 inner boxes	20 000 pcs
08X8	8.0	8.0	500 pcs	6 bags	3 000 pcs	5 inner boxes	15 000 pcs
08A2	8.0	12.0	500 pcs	4 bags	2 000 pcs	5 inner boxes	10 000 pcs
10A2	10.0	12.0	500 pcs	4 bags	2 000 pcs	5 inner boxes	10 000 pcs

Note:

- Please consult MGT for possible lead length, drawing and ordering code.

RECOMMENDED WAVE SOLDERING PROFILE ▲ THT PACKAGE

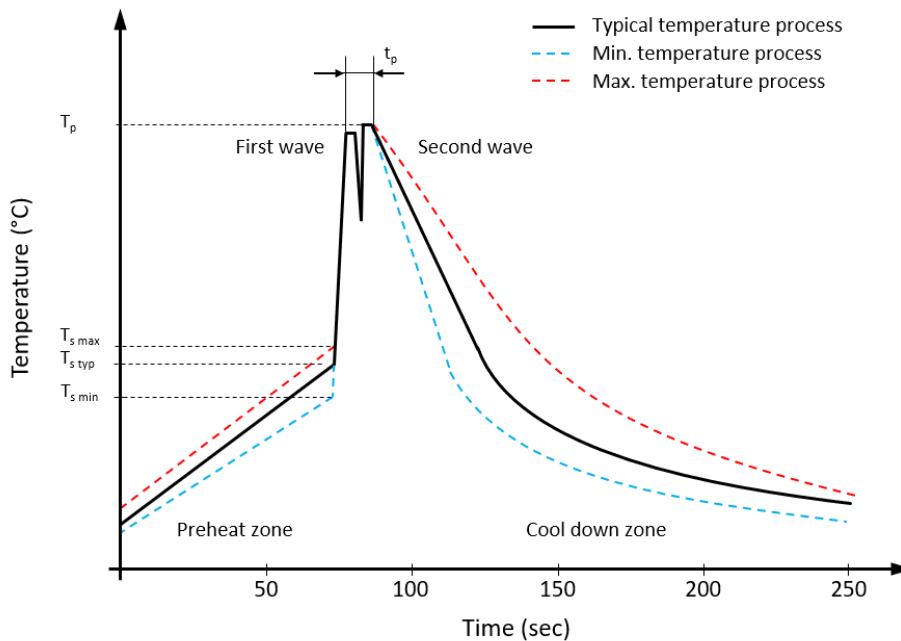

Profile Features		Value ▲ Sn-Pb Assembly	Value ▲ Pb-free Assembly
Preheat temperature min.	$T_{s \min}$	100 °C	100 °C
Preheat temperature typical	$T_{s \text{ typ}}$	120 °C	120 °C
Preheat temperature max.	$T_{s \max}$	130 °C	130 °C
Preheat time t_s from $T_{s \min}$ to $T_{s \max}$	t_s	70 seconds	70 seconds
Peak temperature	T_p	235 °C to 260 °C	245 °C to 260 °C
Time of actual peak temperature	t_p	Max. 10 seconds Max. 5 second each wave	Max. 10 seconds Max. 5 second each wave
Ramp-down rate min.		~ 2 °C/second	~ 2 °C/second
Ramp-down rate typical		~ 3.5 °C/second	~ 3.5 °C/second
Ramp-down rate max.		~ 5 °C/second	~ 5 °C/second
Time 25°C to 25°C		4 minutes	4 minutes

SOLDERING SUGGESTIONS

When solder a capacitor, heat in soldering is conducted to the element of the capacitor from wire lead and an enclosure, and hence it should be noted that soldering under high temperature and a long period may cause deterioration of breakdown of capacitors. Be sure to solder within the recommended temperature condition range.

HAND SOLDERING

- Soldering iron top temperature: $\leq 350^\circ\text{C}$
- Soldering time: $\leq 3\text{sec}$

If re-work or dipping twice is necessary, it should be done after the capacitor returned to the normal temperature.

Suggestion time is 24 hours.

THT capacitors are not suitable for reflow soldering.

When SMD components are used together with film capacitor, the film capacitor should not pass into the SMD adhesive curing oven. The film capacitor should be assembled after the SMD process.

REVISION TABLE

Revision	Date	Status	Notes
001	01/10/2021	Initial release	Initial publication

DISCLAIMER

Except for the written expressed warranties, MGT does not implicitly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any MGT product.

All information and technical specifications made available by MGT are for guidance only and we reserve the right to change or modify them without prior notice. Unless expressly stated in writing by MGT, we reject any guarantees, obligations, or warranties.

All MGT products with the technical specifications described are suitable for use in certain applications. Operating, production, storage and environmental conditions can have a massive influence on the parameters mentioned in the data sheets, which cause the performance to vary over time.

It is subject to the user's duty of care to design and validate his products in such a way that appropriate measures are taken, such as protective circuits or redundant systems to ensure the safety standards required in the application.

MGT components are not designed or rated for use in life support, rescue, safety critical, military, or aerospace applications where failure or malfunction could result in property or environmental damage, serious injury or death. In the aforementioned cases, please contact us before using MGT products.

In principle, we reserve all rights and MGT's general terms and conditions apply. You can find them on our website www.mgt.co.com.