

GR-65J075JZ: IITO-220-3L Cascode GaN HEMT

Description

GR-65J075JZ is a normally-off GaN High electron mobility transistor (HEMT) device using the cascode configuration, which provides high breakdown voltage, high current and high operating speed which is suitable for high power applications.

Key Specifications



Part Number	GR-65J075JZ
V _{DSS} , min.	650V
V _{(TR)DSS}	800V
R _{DS(ON)} , typ.	74mΩ
Q _G , typ.	12.2nC
Package	IITO-220-3L

Features

- Gate drive voltage compatibility (-20V to +20V)
- High operating frequency
- Pin to Pin with CoolMOS/SJ and SiC MOSFET
- Inner Isolation TO-220
- Low Q_{rr}

Applications

- Switch Mode Power Supplies (SMPS)
- AC-DC/ DC-DC Converters
- Motor Drives

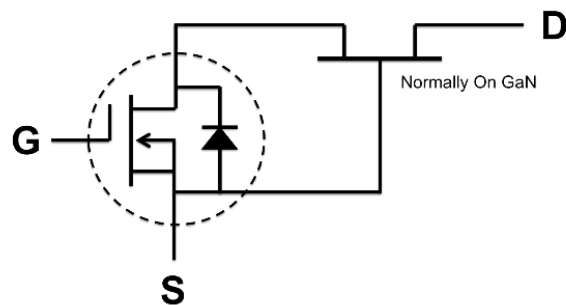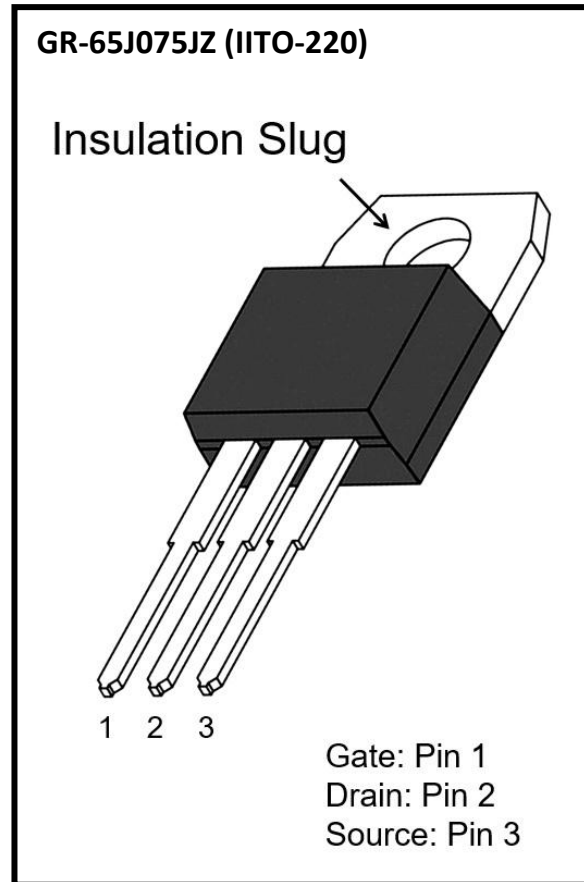

Cascode Device Structure

1- Electrical Characteristics

➤ **Table 1 Absolute maximum ratings**

Symbol	Parameter	Value	Unit
V _{DSS}	Drain-source voltage	650	V
V _{GSS}	Gate- source voltage	-20V ~ +20V	V
I _D	Drain current (continuous) at T _C = 25°C operation	25.0	A
	Drain current (continuous) at T _C = 100°C operation	15.8	A
I _{D, Pulse}	Pulsed drain current (pulse width: 10μs)	93.8	A
P _D	Maximum power dissipation at T _C = 25°C	96	W
T _C	Operating temperature	Case	-55 to +150 °C
T _J		Junction	-55 to +150 °C
T _S	Storage temperature	-55 to +150	°C
T _{SOLD}	Soldering peak temperature ^b	260	°C
MSL	Moisture sensitivity level	MSL3	-

a. In off-state, spike duty cycle D<0.01, spike duration <1μs

b. For 10 sec., 1.6mm from the case

➤ **Table 2 Thermal Characteristics**

Symbol	Parameter	Value	Unit
R _{θJA}	Thermal resistance junction-ambient	55	°C/W
R _{θJC}	Thermal resistance junction-case	1.3	°C/W

Table 3 Electrical Characteristics ($T_{CASE} = 25\text{ }^{\circ}\text{C}$ unless otherwise stated)

Symbol	Parameter	Conditions	Values			Unit
			min.	typ.	max.	
$V_{(BL)DSS}$	Drain-source voltage	$V_{GS}=0V$	650	-	-	V
$V_{GS(th)}$	Gate threshold voltage	$V_{GS}=V_{DS}, I_D=1mA$	2.0	3.0	4.0	V
$R_{DS(on)}$	Static drain-source on-resistance	$V_{GS}=10V, I_D=5A, T_J=25\text{ }^{\circ}\text{C}$	-	74	91	mΩ
		$V_{GS}=10V, I_D=5A, T_J=150\text{ }^{\circ}\text{C}$	-	148	-	
I_{DSS}	Drain-source leakage current	$V_{GS}=0V, V_{DS}=650V, T_J=25\text{ }^{\circ}\text{C}$	-	3.0	60	μA
		$V_{GS}=0V, V_{DS}=650V, T_J=150\text{ }^{\circ}\text{C}$	-	15	-	
I_{GSS}	Gate-to-source forward leakage current	$V_{GS}=20V$	-	-	100	nA
	Gate-to-source reverse leakage current	$V_{GS}=-20V$	-	-	-100	
C_{ISS}	Input capacitance	$V_{GS}=0V, V_{DS}=400V, f=1MHz$	-	851	-	pF
C_{OSS}	Output capacitance		-	32.8	-	
C_{RSS}	Reverse transfer capacitance		-	1.80	-	
Q_G	Gate charge	$V_{GS}=0\sim 10V, V_{DS}=400V, I_{DS}=5A$	-	12.2	-	nC
Q_{GS}	Gate-source charge		-	3.45	-	
Q_{GD}	Drain-source charge		-	2.30	-	
Q_{OSS}	Output charge	$V_{GS}=0V, V_{DS}=0\sim 400V$	-	51.9	-	
$t_{D(on)}$	Turn-on delay time	$V_{DS}=400V, V_{GS}=0\text{ to }10V, I_{DS}=15A, R_G=70\Omega$	-	33	-	ns
t_R	Rise time		-	16	-	
$t_{D(off)}$	Turn-off delay time		-	53	-	
t_F	Fall time		-	10.5	-	
Q_{RR}	Reverse recovery charge	$I_S=5A, V_{DS}=400V$	-	7.8	-	nC
V_{SD}	Reverse Voltage	$V_{GS}=0V, I_S=15A$	-	2.00	-	V
		$V_{GS}=0V, I_S=10A$	-	1.55	-	

2- Typical Characteristic Curves

Fig 1. On-Region Characteristics

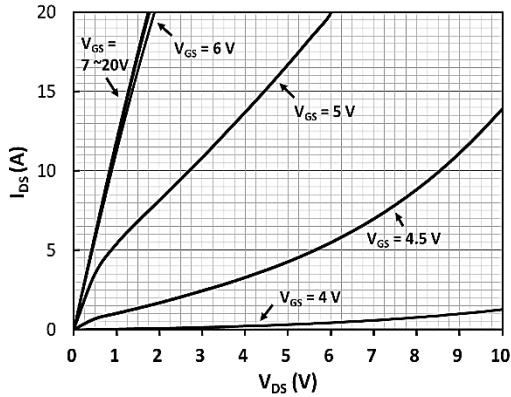


Fig 2. On-Resistance vs Drain Current and Temperature

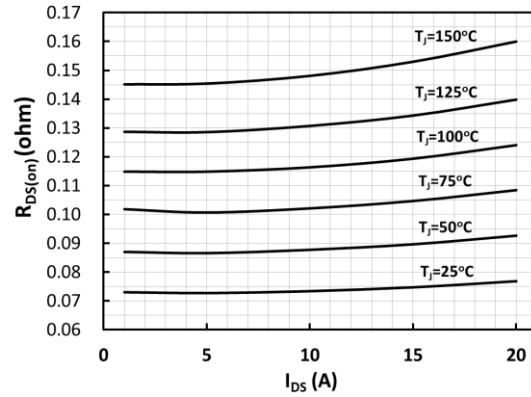


Fig 3. On-Resistance with Drain Current

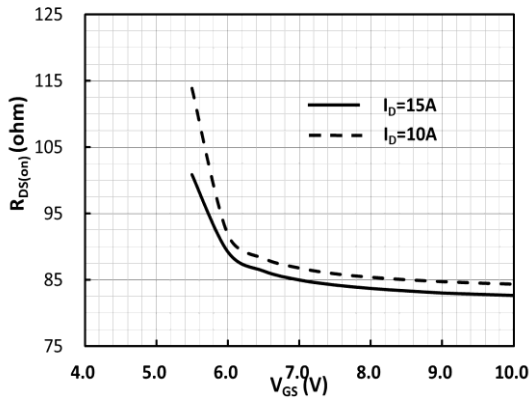


Fig 4. On-Resistance Variation with Temperature

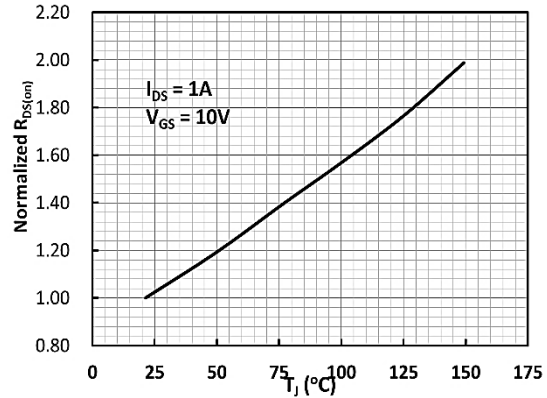


Fig 5. Threshold Voltage with Temperature

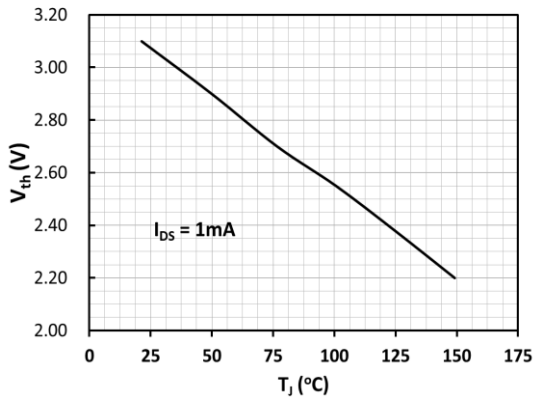


Fig 6. Capacitance Characteristics

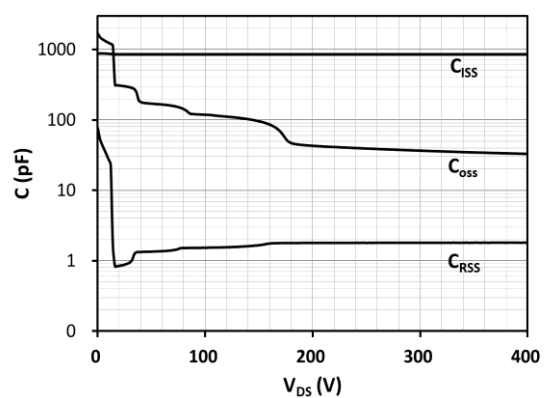


Fig 7. Gate Charge Characteristics, Qg

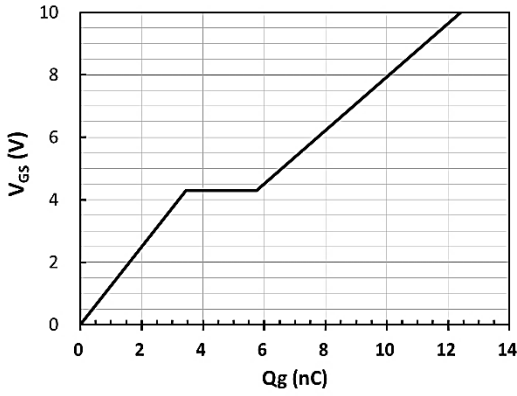


Fig 8. Capacitance Characteristics, Qoss

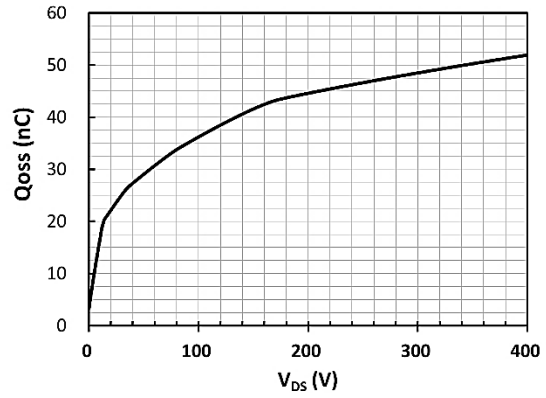


Fig 9. Power Dissipation Derating, Ptot



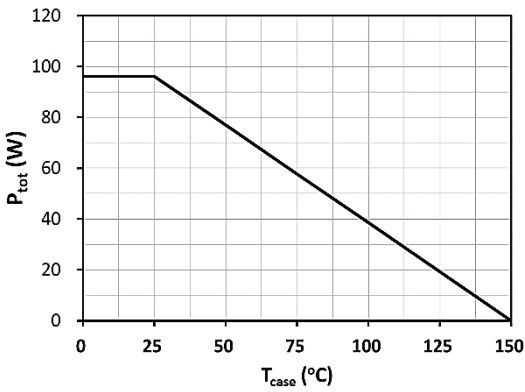


Fig 10. Source-drain diode forward characteristics

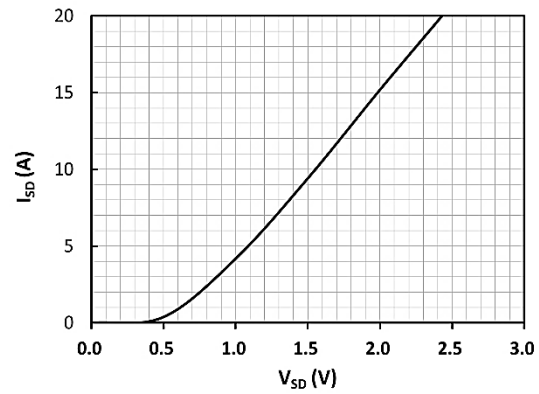




3- Package Outline Dimensions, GR-IITO-220-3L

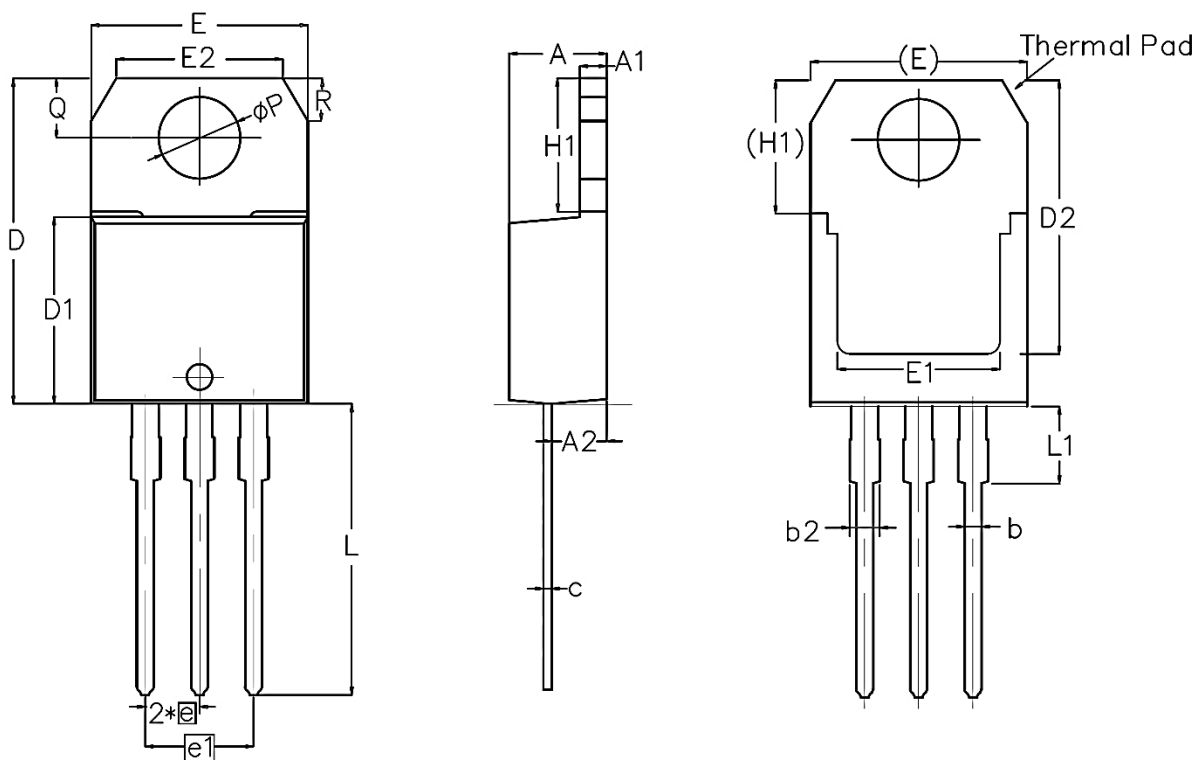

➤ **Table 4 Dimension of GR-IITO-220-3L**

SYMBOL	DIMENSION (IN MM)			SYMBOL	DIMENSION (IN MM)		
	MIN.	NOM.	MAX.		MIN.	NOM.	MAX.
A	4.35	4.45	4.75	E	10.00	10.18	10.40
A1	1.14	1.27	1.40	E1	6.86	7.60	8.89
A2	2.40	2.60	2.80	E2	7.50	7.80	8.10
b	0.69	0.85	1.01	e	2.41	2.54	2.67
b1	0.38	0.83	0.97	e1	4.88	5.08	5.28
b2	1.20	1.46	1.73	H1	6.00	6.20	6.40
b3	1.14	1.44	1.73	L	13.00	13.35	13.70
c	0.36	0.50	0.61	L1	2.70	3.00	3.30
c1	0.36	0.48	0.56	ϕP	3.70	3.80	3.95
D	15.2	15.5	15.8	Q	2.60	2.80	3.00
D1	8.50	--	9.20	R	1.70	2.00	2.20
D2	12.20	12.85	12.88				

4- Tube Package Information

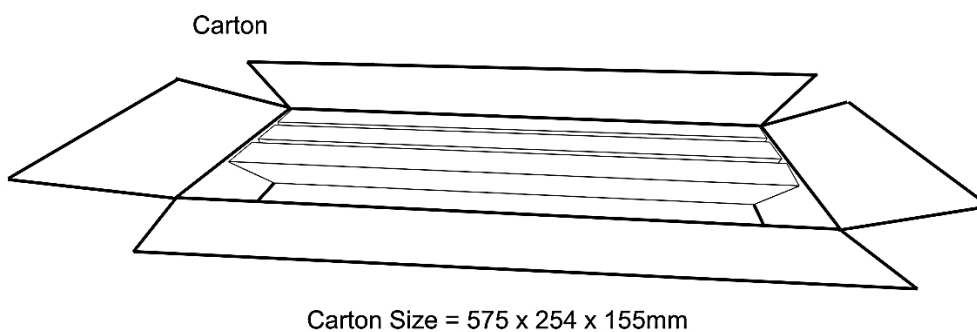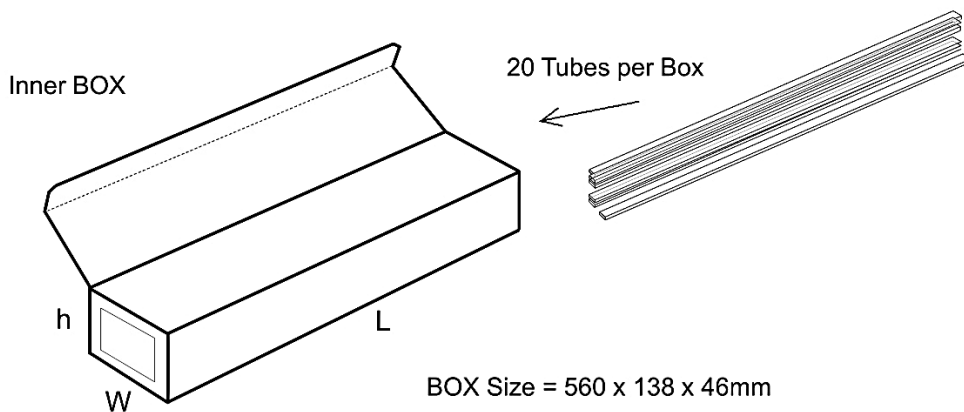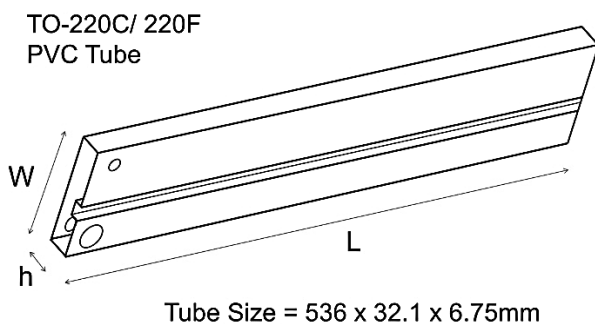

Package Type	Tube	Inner Box	Carton
TO-220C/ TO-220F	50 EA	1000 EA	5000 EA
-	-	X20 Tube	X5 Box

5- Change Log

Version	Date	Description
01	March 28, 2025	Initial version
02	Oct 15, 2025	Tube package information revised
03	April 16, 2026	Electrical characteristics revised

DISCLAIMER

Except for the written expressed warranties, MGT does not implicitly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any MGT product. All information and technical specifications made available by MGT are for guidance only and we reserve the right to change or modify them without prior notice. Unless expressly stated in writing by MGT, we reject any guarantees, obligations, or warranties. All MGT products with the technical specifications described are suitable for use in certain applications. Operating, production, storage and environmental conditions can have a massive influence on the parameters mentioned in the data sheets, which cause the performance to vary over time. It is subject to the user's duty of care to design and validate his products in such a way that appropriate measures are taken, such as protective circuits or redundant systems to ensure the safety standards required in the application. MGT components are not designed or rated for *use in life support, rescue, safety critical, military, or aerospace applications where failure or malfunction could result in property or environmental damage, serious injury or death*. In the aforementioned cases, please contact us before using MGT products. In principle, we reserve all rights and MGT's general terms and conditions apply. You can find them on our website www.mgt.co.com