






MGT-41500_{SERIES}




ISDN So Interface Transformers for EP Type

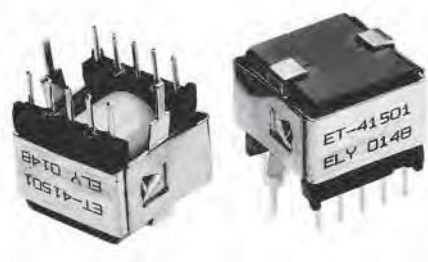

Mechanical Dimensions:

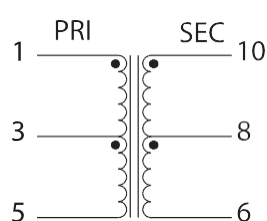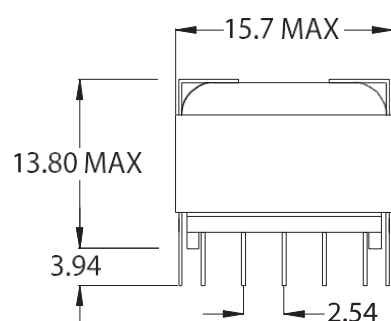

SCHEMATIC A

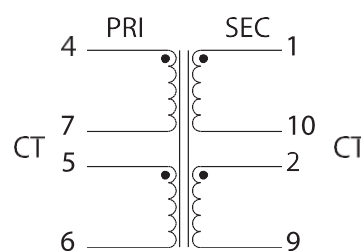

SCHEMATIC B

UNIT:mm

Electrical Specifications at 25 °C

Part Number	Pri Inductance (10 KHz) min.	Leakage Inductance (10 KHz) max.	Interwinding Capacitance (10 KHz) max.	D.C. Resistance (20°ohms max Pri. Sec.		Turns Ratio ±2% Pri : Sec.	Schematic	Dielectric Voltage Pri. to Sec.
MGT-41501	(30 mHy typ.) 22 mHy	20 μ Hy	30 pF	1.1	2.5	1ct : 1ct	A	1,500 Vrms for 1 min
MGT-41502		20 μ Hy	30 pF	1.1	1.3	1ct : 1ct	A	
MGT-41503		20 μ Hy	30 pF	1.1	4.2	1ct : 2.5ct	A	
MGT-41504		20 μ Hy	30 pF	1.1	2.5	1ct : 1.8ct	A	
MGT-41541	22 mHy	20 μ Hy	35 pF	6.0	2.8	2.5ct : 1ct	B	1000 Vrms

