



## MPT SERIES

### AXIAL GENERAL PURPOSE CAPACITOR

#### METALLIZED POLYPROPYLENE CAPACITOR ▲ Axial type

Low dissipation factor at high frequency

Flame retardant plastic case, epoxy resin sealed, UL 94V-0

Self-healing property

High insulation resistance

**High stability of capacitance and dissipation factor**

### SPECIFICATION

| Item                                       |                   | Characteristics  |                    |                 |                         |               |                |
|--|-------------------|--|--------------------|-----------------|-------------------------|---------------|----------------|
| Related Documents                          |                   | IEC 60384-16   |                    |                 |                         |               |                |
| Rated Temperature Range                    |                   | -40°C to +85°C   |                    |                 |                         |               |                |
| Usable Temperature Range <sup>Note 1</sup> |                   | -40°C to +110°C  |                    |                 |                         |               |                |
| Capacitance Range                          | C <sub>R</sub>    | 0.1μF to 10μF  |                    |                 |                         |               |                |
| Capacitance Tolerance                      | ΔC                | ±3% ▲ ±5% ▲ ±10%   |                    |                 |                         |               |                |
| Rated DC Voltage                           | V <sub>R DC</sub> | 250V <sub>DC</sub> ▲ 400V <sub>DC</sub> ▲ 630V <sub>DC</sub>   |                    |                 |                         |               |                |
| Rated AC Voltage                           | V <sub>R AC</sub> | 160V <sub>AC</sub> ▲ 200V <sub>AC</sub> ▲ 250V <sub>AC</sub>   |                    |                 |                         |               |                |
| Dissipation Factor                         | tan δ             | f (kHz)  | C ≤ 0.1μF          | 0.1μF < C ≤ 1μF | 1μF < C ≤ 3μF           | 3μF < C ≤ 5μF | 5μF < C ≤ 10μF |
|  |                   | 1  | ≤ 0.1%             | ≤ 0.1%          | ≤ 0.1%                  | ≤ 0.1%        | ≤ 0.1%         |
|  |                   | 100  | ≤ 0.4%             | ≤ 0.7%          | ≤ 1.2%                  | ≤ 1.8%        | ≤ 2.8%         |
| Insulation Resistance <sup>Note 2</sup>    | R <sub>INS</sub>  | C <sub>R</sub> ≤ 0.33μF  |                    |                 | C <sub>R</sub> > 0.33μF |               |                |
|  |                   | ≥ 30GΩ   |                    |                 | ≥ 10GΩ x μF             |               |                |
| Withstand Voltage <sup>Note 3</sup>        | V <sub>W</sub>    | 1.6 x V <sub>R</sub> applied for 2 sec. (cut off current 10mA) |                    |                 |                         |               |                |
| Maximum Pulse Rise Slope<br>dV/dt          | Length (mm)       | 250V <sub>DC</sub>   | 400V <sub>DC</sub> |                 | 630V <sub>DC</sub>      |               |                |
|  | 25                | 6V/μs  | 8V/μs              |                 | 14V/μs                  |               |                |
|  | 27                | 5V/μs  | 7.5V/μs            |                 | 12V/μs                  |               |                |
|  | 33                | 3V/μs  | 5V/μs              |                 | 7V/μs                   |               |                |
|  | 38                | 2V/μs  | 4V/μs              |                 | 5V/μs                   |               |                |
|  | 44                | 2V/μs  | 3V/μs              |                 | 4V/μs                   |               |                |

#### Notes:

- Derating ratio of rated voltage +85°C to +110°
- Terminal to terminal at 20°C ± 5°C
- Terminal to terminal at 20°C ± 5°C

1.5% per °C for rated DC voltage  
Voltage charge time: 1minute; Voltage charge: 100V<sub>DC</sub>  
Slow-up voltage speed: 100V/sec

### APPLICATIONS

| Date Processing   | Industrial Instruments  | Timing & Oscillation  | Temperature Compensation  | Testing Equipment   |
|---|---|---|---|---|
|  |  |  |  |  |


## ELECTRICAL CHARACTERISTICS

| $V_R$   | $C_R$<br>( $\mu F$ ) | Dimensions (mm) |         | $\phi d \pm 0.05$<br>(mm) | Part Number <sup>Note</sup> |
|---|----------------------|-----------------|---------|---------------------------|-----------------------------|
|   |                      | L + 0.5         | D + 0.5 |                           |                             |
| 250V <sub>DC</sub><br>▲<br>160V <sub>AC</sub> | 0.68                 | 25              | 12.5    | 0.8                       | MPT-684□0250DB0000          |
|   | 1                    | 25              | 12.5    | 0.8                       | MPT-105□0250DB0000          |
|   | 1.5                  | 33              | 15      | 0.8                       | MPT-155□0250DB0000          |
|   | 2.2                  | 33              | 17      | 0.8                       | MPT-225□0250DB0000          |
|   | 3.3                  | 33              | 19      | 0.8                       | MPT-335□0250DB0000          |
|   | 4.7                  | 38              | 20.5    | 0.8                       | MPT-475□0250DB0000          |
|   | 6.8                  | 44              | 23      | 0.8                       | MPT-685□0250DB0000          |
|   | 10                   | 44              | 26      | 0.8                       | MPT-106□0250DB0000          |
| 400V <sub>DC</sub><br>▲<br>200V <sub>AC</sub> | 0.33                 | 27              | 11.5    | 0.8                       | MPT-334□0400DB0000          |
|   | 0.47                 | 27              | 13      | 0.8                       | MPT-474□0400DB0000          |
|   | 0.68                 | 33              | 14.5    | 0.8                       | MPT-684□0400DB0000          |
|   | 1                    | 33              | 17.5    | 0.8                       | MPT-105□0400DB0000          |
|   | 1.5                  | 33              | 20.5    | 0.8                       | MPT-155□0400DB0000          |
|   | 2.2                  | 38              | 22      | 0.8                       | MPT-225□0400DB0000          |
|   | 3.3                  | 44              | 26      | 0.8                       | MPT-335□0400DB0000          |
| 630V <sub>DC</sub><br>▲<br>250V <sub>AC</sub> | 0.1                  | 27              | 11.5    | 0.8                       | MPT-104□0630DB0000          |
|   | 0.15                 | 27              | 13      | 0.8                       | MPT-154□0630DB0000          |
|   | 0.22                 | 33              | 13      | 0.8                       | MPT-224□0630DB0000          |
|   | 0.33                 | 33              | 16      | 0.8                       | MPT-334□0630DB0000          |
|   | 0.47                 | 33              | 18      | 0.8                       | MPT-474□0630DB0000          |
|   | 0.68                 | 33              | 20      | 0.8                       | MPT-684□0630DB0000          |
|   | 1                    | 38              | 21      | 0.8                       | MPT-105□0630DB0000          |
|   | 1.5                  | 44              | 22      | 0.8                       | MPT-155□0630DB0000          |
|   | 2.2                  | 44              | 27      | 0.8                       | MPT-225□0630DB0000          |


Note: Enter the appropriate tolerance code □ from the product code table

## PACKAGE OUTLINE ▲ All dimensions in mm

### Axial Package

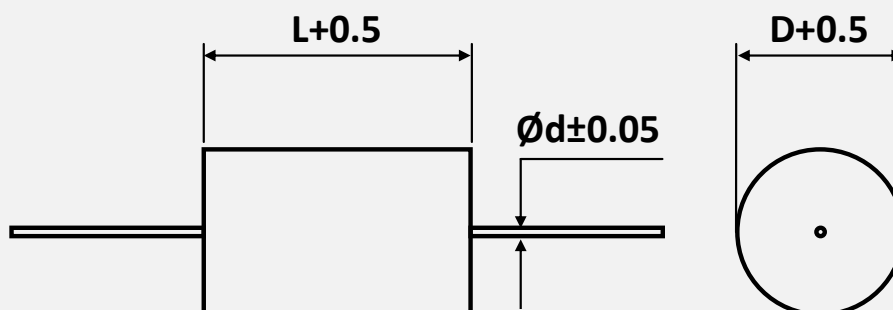

## PRODUCT MARKING
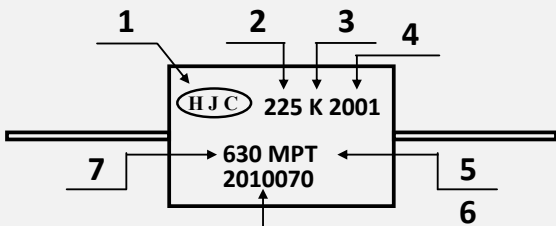
| Marking  |  |  |  |  |  | Details |                                      |
|--|--|--|--|--|--|---------|--------------------------------------|
|                     |  |  |  |  |  | No.     | Description                          |
|  |  |  |  |  |  | 1       | Manufacturer Logo *                  |
|  |  |  |  |  |  | 2       | Nominal capacitance in $\mu\text{F}$ |
|  |  |  |  |  |  | 3       | Capacitance tolerance                |
|  |  |  |  |  |  | 4       | Date code                            |
|  |  |  |  |  |  | 5       | Series name                          |
|  |  |  |  |  |  | 6       | Production no.                       |
| $L \leq 10.5\text{mm}$ <b>H</b> $L 13 \text{ to } 33\text{mm}$ <b>H</b> $L > 33\text{mm}$ <b>HJC</b> |  |  |  |  |  | 7       | DC rated voltage                     |

## DATE CODE & APPLICATION CATEGORY

Example:

### Date code

2001: 2001 = 1<sup>st</sup> week of 2020

### Lot number

2010070: 20 = Year, here 2020  
1 = Month, here January  
0001 to XXXX = Serial number

| 20   |      | 01   |                  |
|------|------|------|------------------|
| Year |      | Week |                  |
| 19   | 2019 | 01   | 1 <sup>st</sup>  |
| 20   | 2020 | 02   | 2 <sup>nd</sup>  |
| 21   | 2021 | 03   | 3 <sup>rd</sup>  |
| 22   | 2022 | 04   | 4 <sup>th</sup>  |
| 23   | 2023 | 05   | 5 <sup>th</sup>  |
| ...  | ...  | ...  | ...              |
| 30   | 2030 | 53   | 53 <sup>rd</sup> |

## PRODUCT CODE

Example: MPT series ▲ 2.2 $\mu\text{F}$  ▲ 630V<sub>DC</sub> ▲  $\pm 10\%$  ▲ Axial ▲ L x D = 44 x 27mm ▲ Bulk

| MPT-   |        | 225                                    |               | K                         |          | 0630                             |     | D            |      | B              |      | 0                  |       | 00         |       | 0                |       |
|--------|--------|--|---------------|---------------------------|----------|----------------------------------|-----|--------------|------|----------------|------|--------------------|-------|------------|-------|------------------|-------|
| Series |        | Capacitance Code <sup>Note1</sup> (pF) |               | Capacitance Tolerance (%) |          | Rated Voltage (V <sub>DC</sub> ) |     | Voltage Type |      | Packaging Type |      | Lead Configuration |       | Pitch (mm) |       | Lead Length (mm) |       |
| Code   | Series | Code                                   | $\mu\text{F}$ | Code                      | Tol.     | Code                             | VDC | Code         | Type | Code           | Type | Code               | Style | Code       | mm    | Code             | mm    |
| MPT-   | MPT-   | 104                                    | 0.1           | H                         | $\pm 3$  | 0250                             | 250 | D            | DC   | B              | Bulk | 0                  | Axial | 00         | Axial | 0                | Axial |
|        |        | 474                                    | 0.47          | J                         | $\pm 5$  | 0400                             | 400 |              |      |                |      |                    |       |            |       |                  |       |
|        |        | 105                                    | 1             | K                         | $\pm 10$ | 0630                             | 630 |              |      |                |      |                    |       |            |       |                  |       |
|        |        | 335                                    | 3.3           |                           |          |                                  |     |              |      |                |      |                    |       |            |       |                  |       |
|        |        | 106                                    | 10            |                           |          |                                  |     |              |      |                |      |                    |       |            |       |                  |       |

Note:

- Capacitance code expressed in pF. The first two digits represent significant figures. The last digit specifies the total number of zeros to be added.

## REFERENCE DATA

Fig. 1 • Capacitance Drift vs. Ambient Temperature

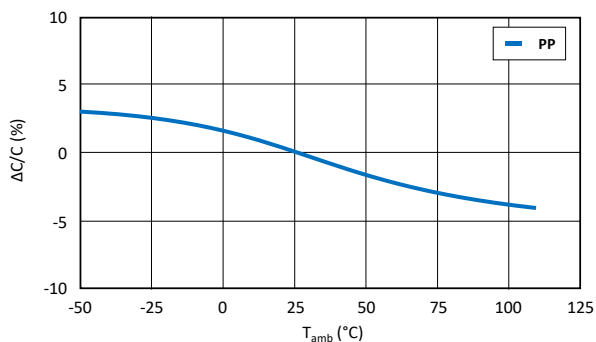


Fig. 2 • Insulation Resistance vs. Ambient Temperature

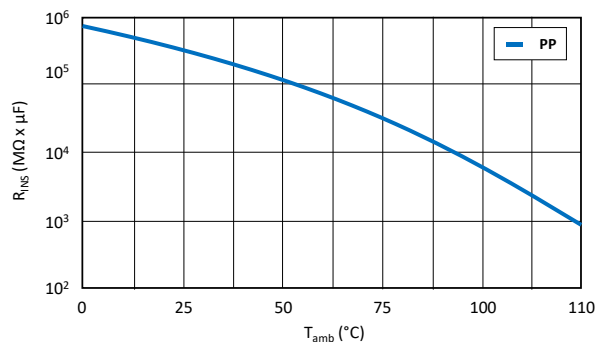


Fig. 3 • Dissipation Factor vs. Ambient Temperature

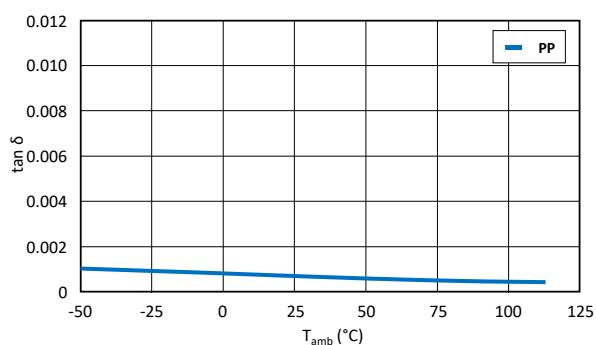


Fig. 4 • Dissipation Factor vs. Frequency

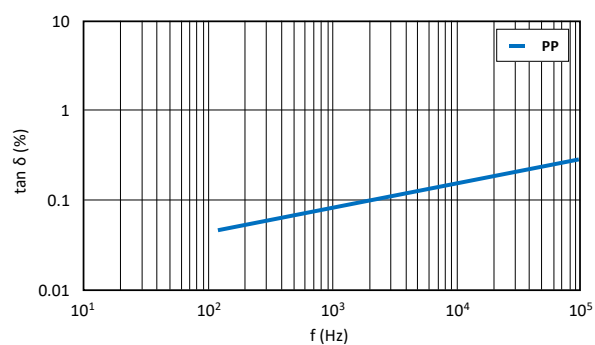


Fig. 5 • Capacitance Drift vs. Frequency

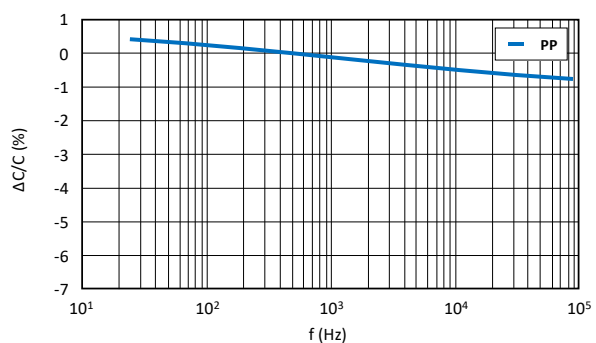
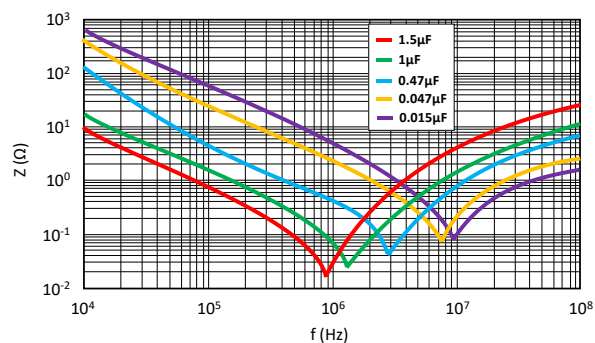
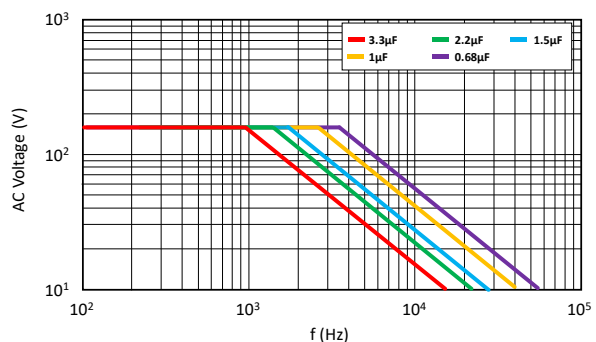
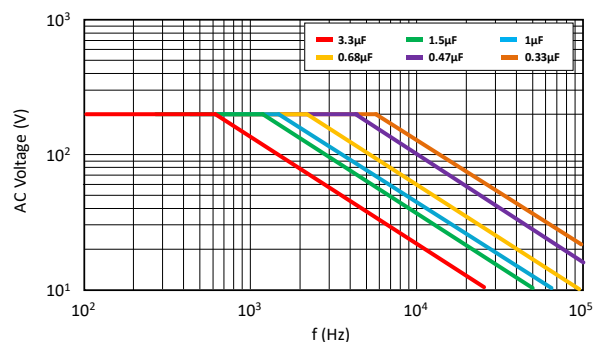


Fig. 6 • Impedance vs. Frequency • Typical Curve


Fig. 7 • Max. RMS Voltage vs. Frequency • 250V<sub>DC</sub>/160V<sub>AC</sub>

Fig. 8 • Max. RMS Voltage vs. Frequency • 400V<sub>DC</sub>/200V<sub>AC</sub>


## REFERENCE DATA

Fig. 9 • Max. RMS Voltage vs. Frequency - 630V<sub>DC</sub>/250V<sub>AC</sub>

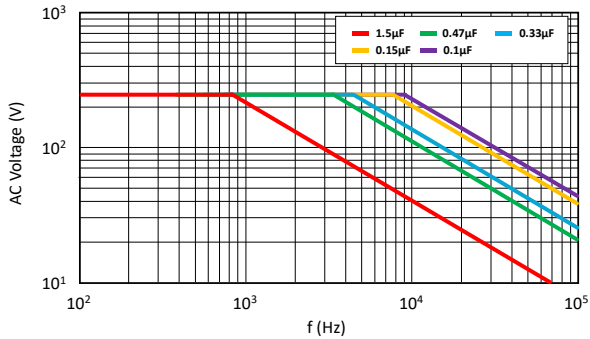


Fig. 10 • Max. DC and AC Voltage vs. Temperature

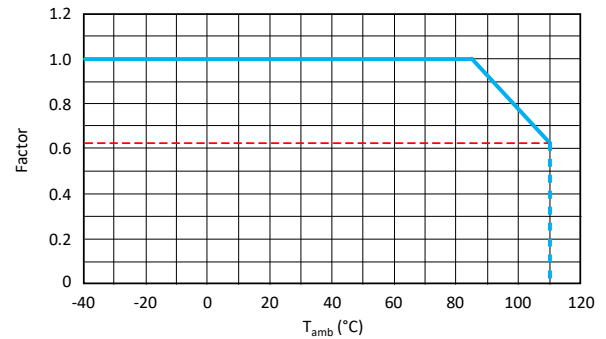


Fig. 11 • Permissible Current Derating by Temperature


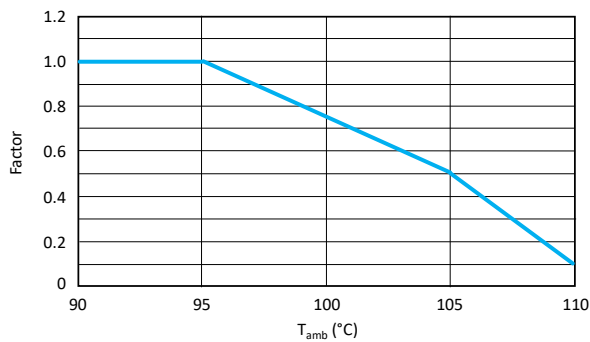


Fig. 12 • Max. RMS Current - Wave Form

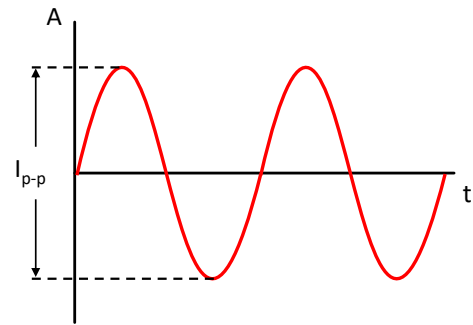


## MAXIMUM RMS CURRENT

| $V_R$   | $C_R$<br>( $\mu F$ ) | L x D<br>(mm) | $I_{RMS} (A_{RMS})$ at f |       |       |       |       |        |        |        |
|---|----------------------|---------------|--------------------------|-------|-------|-------|-------|--------|--------|--------|
|   |                      |               | 15.75kHz                 | 35kHz | 45kHz | 65kHz | 80kHz | 100kHz | 130kHz | 200kHz |
| 250V <sub>DC</sub><br>▲<br>160V <sub>AC</sub> | 0.68                 | 25 x 12.5     | 3.81                     | 4.22  | 4.32  | 4.46  | 4.60  | 4.68   | 4.76   | 4.89   |
|   | 1                    | 25 x 12.5     | 4.21                     | 4.62  | 4.72  | 4.86  | 5.03  | 5.10   | 5.16   | 5.29   |
|   | 1.5                  | 33 x 15       | 4.20                     | 4.60  | 4.80  | 4.94  | 5.11  | 5.18   | 5.23   | 5.34   |
|   | 2.2                  | 33 x 17       | 5.00                     | 5.46  | 5.50  | 5.76  | 5.82  | 5.84   | 5.84   | 5.84   |
|   | 3.3                  | 33 x 19       | 5.15                     | 5.55  | 5.70  | 5.78  | 5.86  | 5.86   | 5.86   | 5.86   |
|   | 4.7                  | 38 x 20.5     | 5.30                     | 5.84  | 6.00  | 6.08  | 6.16  | 6.08   | 6.00   | 5.84   |
|   | 6.8                  | 44 x 23       | 5.90                     | 6.35  | 6.52  | 6.59  | 6.66  | 6.59   | 6.53   | 6.34   |
|   | 10                   | 44 x 26       | 7.30                     | 7.85  | 8.02  | 8.09  | 8.16  | 8.09   | 8.03   | 7.84   |
| 400V <sub>DC</sub><br>▲<br>200V <sub>AC</sub> | 0.33                 | 27 x 11.5     | 2.95                     | 3.51  | 3.66  | 4.01  | 4.22  | 4.43   | 4.71   | 5.13   |
|   | 0.47                 | 27 x 13       | 3.34                     | 3.90  | 4.10  | 4.35  | 4.56  | 4.80   | 5.00   | 5.60   |
|   | 0.68                 | 33 x 14.5     | 2.80                     | 3.30  | 3.60  | 3.90  | 4.10  | 4.20   | 4.50   | 4.79   |
|   | 1                    | 33 x 17.5     | 3.00                     | 3.70  | 4.00  | 4.30  | 4.50  | 4.70   | 4.90   | 5.19   |
|   | 1.5                  | 33 x 20.5     | 3.90                     | 4.50  | 4.80  | 5.00  | 5.50  | 5.80   | 6.10   | 6.47   |
|   | 2.2                  | 38 x 22       | 4.20                     | 5.00  | 5.20  | 5.60  | 5.90  | 6.20   | 6.50   | 7.00   |
|   | 3.3                  | 44 x 26       | 5.00                     | 6.00  | 6.50  | 7.00  | 7.30  | 7.54   | 7.54   | 7.54   |
| 630V <sub>DC</sub><br>▲<br>250V <sub>AC</sub> | 0.1                  | 27 x 15       | 1.65                     | 2.07  | 2.19  | 2.40  | 2.55  | 2.71   | 2.98   | 3.27   |
|   | 0.15                 | 27 x 13       | 2.20                     | 2.70  | 2.90  | 3.20  | 3.30  | 3.60   | 3.80   | 4.40   |
|   | 0.22                 | 33 x 13       | 2.50                     | 3.10  | 3.30  | 3.60  | 3.90  | 4.20   | 4.50   | 4.90   |
|   | 0.33                 | 33 x 16       | 3.20                     | 4.00  | 4.30  | 4.70  | 4.90  | 5.30   | 5.50   | 6.30   |
|   | 0.47                 | 33 x 18       | 3.80                     | 4.70  | 5.00  | 5.50  | 5.80  | 6.20   | 6.60   | 7.50   |
|   | 0.68                 | 33 x 20       | 4.00                     | 5.00  | 5.50  | 6.00  | 6.40  | 6.80   | 7.30   | 8.00   |
|   | 1                    | 38 x 21       | 3.60                     | 4.30  | 4.80  | 5.30  | 5.60  | 6.00   | 6.45   | 6.94   |
|   | 1.5                  | 44 x 22       | 4.30                     | 5.30  | 5.70  | 6.20  | 6.60  | 7.22   | 7.12   | 6.91   |
|   | 2.2                  | 44 x 27       | 5.50                     | 6.70  | 7.50  | 8.00  | 8.50  | 9.50   | 10.30  | 10.13  |


Note: Maximum capacitor surface temperature  $T_s \leq 110^\circ C$ ; Maximum body temperature rise  $\Delta T \leq 10^\circ C$

$$I_{RMS} = \frac{I_{p-p}}{2 \cdot \sqrt{2}}$$

## TECHNICAL SPECIFICATION
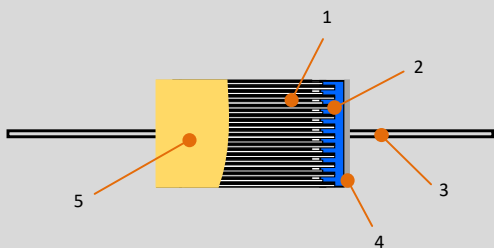
| No.  | Category                                    | Specification  |  |   |                    |                      |                    |
|--|---|--|--|---|--------------------|----------------------|--------------------|
| 1  | Scope                                       | This specification applies to capacitors for general electronics applications.<br>Reference standards: IEC 60384-16  |  |   |                    |                      |                    |
| 2  | Product Name                                | Metallized polypropylene film capacitor, Type MPT  |  |   |                    |                      |                    |
| 3  | Construction                                | Dimensions:  |  | Refer to dimensions drawing   |                    |                      |                    |
|  |   |   |  |   |                    |                      |                    |
|  |   | 1 = Element  |  | Metallized Polypropylene film   |                    |                      |                    |
|  |   | 2 = Metal spray  |  | Special solder. (Lead Free) compliant to RoHS directive   |                    |                      |                    |
|  |   | 3 = Lead wire  |  | Tinned wire (Cu wire) or tinned copper clad-steel wire (CP wire). (Lead Free) compliant to RoHS directive |                    |                      |                    |
|  |   | 4 = Inner coating  |  | Epoxy resin filled. (UL-94V-0 Standard)   |                    |                      |                    |
|  |   | 5 = Outer coating  |  | Polyester tape wrapping. (UL-510)   |                    |                      |                    |
| 4  | Atmospheric and Temperature Characteristics | <b>Standard atmospheric conditions.</b><br>Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows:   |  |   |                    |                      |                    |
|  |   | Ambient temperature:   |  | 15 to 35°C  |                    |                      |                    |
|  |   | Relative humidity  |  | 45% to 85%  |                    |                      |                    |
|  |   | Air pressure   |  | 86 to 106 kPa   |                    |                      |                    |
|  |   | <b>If there may be any doubt on the results, measurements shall be made within the following limits.</b>   |  |   |                    |                      |                    |
|  |   | Ambient temperature:   |  | 20°C ± 5°C  |                    |                      |                    |
|  |   | Relative humidity:   |  | 60 to 70%   |                    |                      |                    |
|  |   | <b>Operating temperature range</b>   |  |   |                    |                      |                    |
|  |   | Lowest operating temperature:  |  | -40°C   |                    |                      |                    |
|  |   | Maximum operating temperature:   |  | +110°C (case-temperature) with specified voltage-derating   |                    |                      |                    |
|  |   | The capacitor can be operated up to 110°C case-temperature (according to the power to be dissipated).<br>Derating ratio of rated voltage +85°C to +110°C: 1.5% per °C for V <sub>RDC</sub><br>The temperature is measured at the hottest point of the case when the capacitor has reached its thermal equilibrium. |  |   |                    |                      |                    |
| Rated temperature range  |   | -40°C to +85°C   |  |   |                    |                      |                    |
| Rated temperature range is the range of ambient temperature for which the capacitor can be operated continuously at rated voltage. |   |  |  |   |                    |                      |                    |
| 5  | Electrical Characteristics                  | Rated voltage:   |  | V <sub>R</sub> at 85°C  | 250V <sub>DC</sub> | 400V <sub>DC</sub>   | 630V <sub>DC</sub> |
|  |   | Category voltage:  |  | Up to 85°C    V <sub>C</sub> = V <sub>R</sub>   |                    |                      |                    |
|  |   | Rated upper limit temperature:   |  | +85°C   |                    |                      |                    |
|  |   | Usable upper limit temperature:  |  | +110°C  |                    |                      |                    |
|  |   | Capacitance range:   |  | 0.1μF to 10μF   |                    |                      |                    |
|  |   | Capacitance tolerance:   |  | ±3% (H), ±5% (J), ±10% (K)  |                    | Measured at 1kHz, 1V |                    |

## TECHNICAL SPECIFICATION
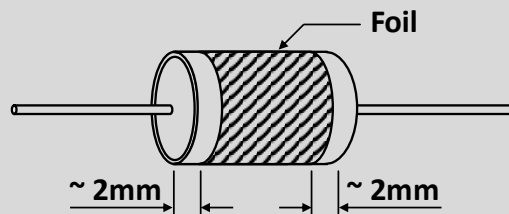
| No.   | Category  | Specification  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|---|---|--|--|---|--|--|---------------------------------------|---------------------------------------|---|---------------|---------------|---------------|---------------|---------------|-----|---------------|---------------|---------------|---------------|---------------|
| 5   | Electrical Characteristics  | <b>Dissipation factor <math>\tan\delta</math> (%): LCR meter: HP-4284A, at <math>20^{\circ}\text{C} \pm 5^{\circ}\text{C}</math></b>   |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | <table><tr><td>f (kHz)</td><td><math>C \leq 0.1\mu\text{F}</math></td><td><math>0.1\mu\text{F} &lt; C \leq 1\mu\text{F}</math></td><td><math>1\mu\text{F} &lt; C \leq 3\mu\text{F}</math></td><td><math>3\mu\text{F} &lt; C \leq 5\mu\text{F}</math></td><td><math>5\mu\text{F} &lt; C \leq 10\mu\text{F}</math></td></tr><tr><td>1</td><td><math>\leq 0.10\%</math></td><td><math>\leq 0.10\%</math></td><td><math>\leq 0.10\%</math></td><td><math>\leq 0.10\%</math></td><td><math>\leq 0.10\%</math></td></tr><tr><td>100</td><td><math>\leq 0.40\%</math></td><td><math>\leq 0.70\%</math></td><td><math>\leq 1.20\%</math></td><td><math>\leq 1.80\%</math></td><td><math>\leq 2.80\%</math></td></tr></table> | f (kHz)  | $C \leq 0.1\mu\text{F}$                 | $0.1\mu\text{F} < C \leq 1\mu\text{F}$ | $1\mu\text{F} < C \leq 3\mu\text{F}$                                 | $3\mu\text{F} < C \leq 5\mu\text{F}$  | $5\mu\text{F} < C \leq 10\mu\text{F}$ | 1 | $\leq 0.10\%$ | $\leq 0.10\%$ | $\leq 0.10\%$ | $\leq 0.10\%$ | $\leq 0.10\%$ | 100 | $\leq 0.40\%$ | $\leq 0.70\%$ | $\leq 1.20\%$ | $\leq 1.80\%$ | $\leq 2.80\%$ |
|   |   | f (kHz)  | $C \leq 0.1\mu\text{F}$  | $0.1\mu\text{F} < C \leq 1\mu\text{F}$  | $1\mu\text{F} < C \leq 3\mu\text{F}$   | $3\mu\text{F} < C \leq 5\mu\text{F}$                                 | $5\mu\text{F} < C \leq 10\mu\text{F}$ |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | 1  | $\leq 0.10\%$  | $\leq 0.10\%$                           | $\leq 0.10\%$                          | $\leq 0.10\%$  | $\leq 0.10\%$                         |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | 100  | $\leq 0.40\%$  | $\leq 0.70\%$                           | $\leq 1.20\%$                          | $\leq 1.80\%$  | $\leq 2.80\%$                         |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | <b>Insulation resistance between terminals</b>   |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | Test conditions:   |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | Temperature:   | $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$   |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | Voltage charge:  | $100V_{\text{DC}}$   |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | Performance:   | $C \leq 0.33\mu\text{F}$   |   |  | $C > 0.33\mu\text{F}$  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  | After voltage charge<br>1 minute $\geq 30G\Omega$                                    |   |  | After voltage charge<br>1 minute $\geq 10G\Omega \times \mu\text{F}$ |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | <b>Test voltage between terminals</b>  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | $1.6 \times V_{\text{RDC}}$ applied for 2 sec, at $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$   |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | Cut off current:   | 10mA, slow up voltage speed: 100V/sec  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   | Ramp/rise time:  | $C \leq 10\mu\text{F}$ : 5 sec   |   |  | $C > 10\mu\text{F}$ : 10 sec   |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| Performance:  | There shall be no dielectric breakdown or other damage  |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| <b>Dielectric strength between terminal and enclosure</b>   |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| Apply 200% of rated voltage between terminals and enclosure for 2 to 5 sec  |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| Method of the test described as below   |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| <p>A metal foil shall be closely wrapped around the body of the capacitor to a distance of 2mm from the terminations as shown in fig 1.</p> |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  | Fig. 1   |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| Performance:  | There shall be no dielectric breakdown or other damage  |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| Test Item   | The test capacitor shall be kept in the testing oven and kept at condition of following table, and it shall be repeated for 5 cycles successively. After the test, the capacitor shall be let alone at the ordinary condition for 2 hours |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   | Conditions  |  |  | Performance                             |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
| Rapid change of temperature<br>(IEC68-2-14 Na)  | Step  | Temperature  | Time   |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   | 1   | $-40 \pm 3^{\circ}\text{C}$  | $30 \pm 3$ min   | Capacitance change                      |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   | 2   | Ordinary   | 3 min or less  | $ \Delta C/C  \leq \pm 10\%$            |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   | 3   | $+110 \pm 2^{\circ}\text{C}$   | $30 \pm 3$ min   | $\tan \delta$ change                    |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   | 4   | Ordinary   | 3 min or less  | $\leq 0.1\%$ at 1kHz                    |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  |  | R insulation $\geq 50\%$ of limit value |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |
|   |   |  |  |   |  |  |                                       |                                       |   |               |               |               |               |               |     |               |               |               |               |               |




## TECHNICAL SPECIFICATION

| No. | Category                   | Specification                                    |   |  |
|-----|----------------------------|--|---|--|
|     |                            | Test Item  | Conditions  | Performance  |
| 6   | Mechanical Characteristics | Robustness of terminations<br>(IEC68-2-21)       | Tensile Ua1   | There shall be no such mechanical damage as terminal damage etc.   |
|     |                            |  | A load of 10 N (1.0kg) shall be gradually applied to the terminal in the axial direction and held thus for 10 sec   |  |
|     |                            |  | Bending Ub methode 1  |  |
|     |                            |  | While a load of 500g applied to the lead wire, the body of the capacitor shall be bent 90° and returned to the original position. This operation shall be conducted in a few seconds. Then the body shall be bent 90° at the same speed in the opposite direction and returned to the original position   |  |
| 7   | Endurance Characteristics  | Solderability<br>(IEC68-2-20 Ta)                 | Solder bath: 245°C ± 5°C<br>Immersion time: 2.5±0.5sec<br>Visual examination  | At least 95% of the circumferential face of lead wire up to immersed level shall be covered with new solder  |
|     |                            | Resistance to soldering heat<br>(IEC 68-2-20 Tb) | Solder bath: 260 °C ± 5 °C<br>Immersion time: 10±1sec<br>Thickness of heat shunt<br>(Printed wiring board): 1.6mm<br>Capacitance at 1kHz<br>tan δ at 1kHz   | Capacitance change<br> ΔC/C  ≤ ± 1%<br>tan δ change<br>≤ 0.1% at 1kHz  |
|     |                            | Vibration proof<br>(IEC68-2-6 Fc)                | The frequency shall be varied form from 10Hz to 55Hz at 1.5mm amplitude and back to 10Hz in approximately 1-minute intervals. This motion shall be applied for a period of 2 hours in each of 3 mutually perpendicular directions. During the last 30 min of vibration in each direction, checks shall be made for open or short-circuit and interruption | Bending strength:<br>There shall be no open or short-circuiting and the connections must be stabilized.      |
|     |                            |  |   | Appearance:<br>There shall be no such mechanical damage as terminal damage etc.                              |
|     |                            | Damp heat steady state<br>(IEC68-2-3 Ca)         | The capacitor shall be stored at a temperature of 40 ± 2°C and relative humidity of 90% to 95% for 1000 hours. And then the capacitor shall be subjected to standard atmospheric conditions for 1 to 2 hours, after which measurement shall be made   | Capacitance change<br> ΔC/C  ≤ ± 3%<br>tan δ change<br>≤ 0.1% at 1kHz<br>R insulation ≥ 50 % of limit value  |
|     |                            | Electrical endurance<br>(IEC 60384-2)            | 125% of category voltage shall be applied to the capacitor at a temperature of 110 ± 2°C for 1000 hours. Then the capacitor shall be subjected to standard atmospheric conditions for 1 to 2 hours, after which measurement shall be made. The load resistor in series with the capacitor shall be 20Ω to 1kΩ.  | Capacitance change<br> ΔC/C  ≤ ± 10%<br>tan δ change<br>≤ 0.4% at 1kHz<br>R insulation ≥ 50 % of limit value |

## TECHNICAL SPECIFICATION

| No. | Category           | Specification   |
|-----|--------------------|---|
| 8   | Storage conditions | It should be noted that the solderability of the terminals may be deteriorated when stored barely in an atmosphere for a long period.   |
|     |                    | It should not be located in particularly high temperature and high humidity, it must submit to the following conditions (Keeping in the original package)<br>Temperature: 5°C to 35°C<br>Relative humidity: ≤ 70%<br>Storage period: ≤ 12 months<br>(Following the manufacturing date marked on the label in package bag) |
|     |                    | Avoid wetting the capacitor by water, oil, salt and/or poisonous gas.   |
|     |                    | If used the capacitor that overdue the storage time, it should be test, the characteristics of the capacitor or contact with our technical engineer.  |
|     |                    |   |



## RECOMMENDED WAVE SOLDERING PROFILE ▲ THT PACKAGE

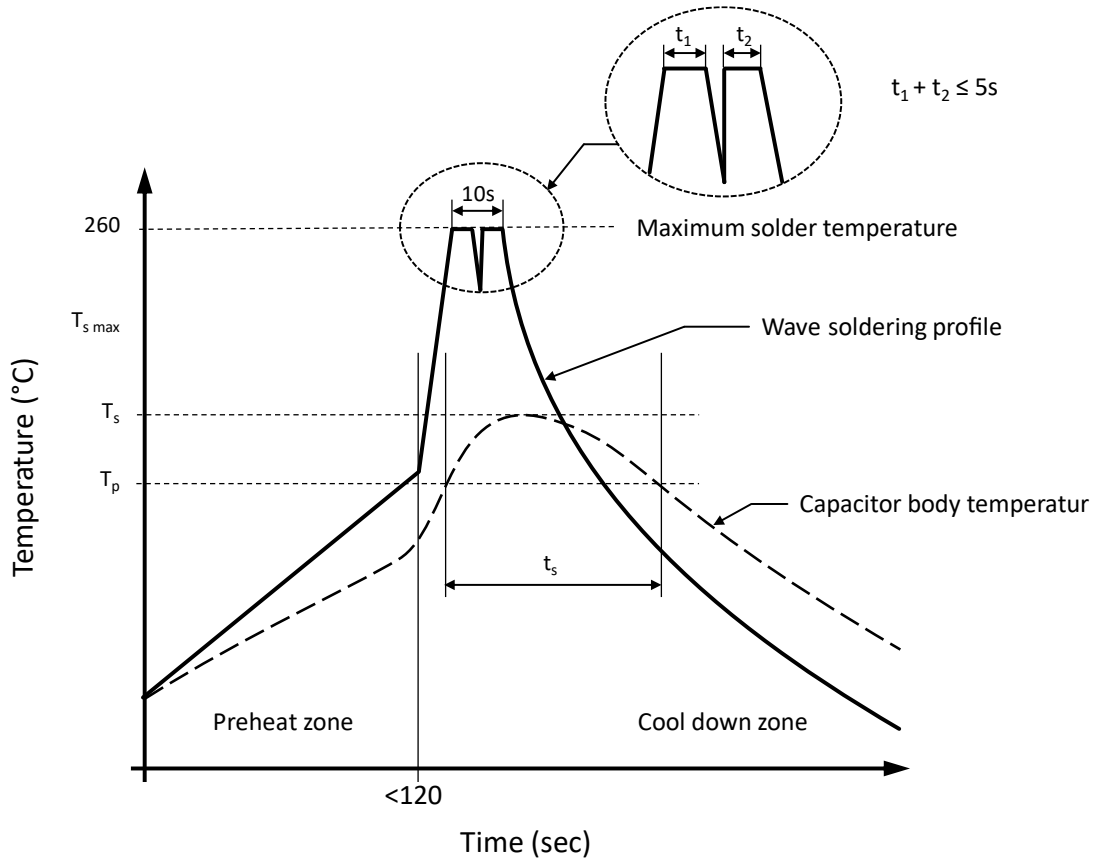

Capacitor body temperature should follow the description below:

| Profile Features                                     |       | Polypropylene Film Capacitor                           | Polyester Film Capacitor                               |
|--|-------|--|--|
| Capacitor body maximum temperature at preheating     | $T_p$ | $\leq 110^\circ\text{C} / 120 \text{ seconds}$         | $\leq 125^\circ\text{C} / 120 \text{ seconds}$         |
| Capacitor body maximum temperature at wave soldering | $T_s$ | $\leq 120^\circ\text{C} / t_s \leq 45 \text{ seconds}$ | $\leq 150^\circ\text{C} / t_s \leq 45 \text{ seconds}$ |

## DETERMINING THE CAPACITOR BODY TEMPERATURE
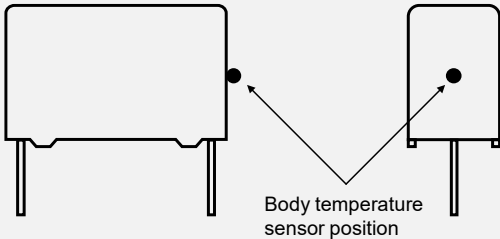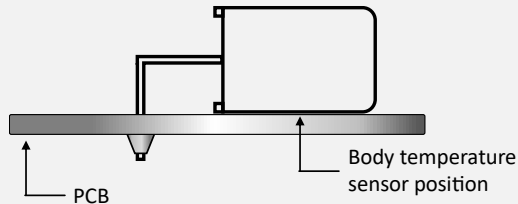
| Vertical Mounting  | Horizontal Mounting  |
|--|--|
|  <p>Body temperature sensor position</p> <p>The body temperature sensor position is defined as the highest temperature point around the capacitor body.</p> |  <p>PCB</p> <p>Body temperature sensor position</p> <p>If there is 90 degree bending product, the sensor position shall be between product and PCB</p> |

## SOLDERING SUGGESTIONS

When solder a capacitor, heat in soldering is conducted to the element of the capacitor from wire lead and an enclosure, and hence it should be noted that soldering under high temperature and a long period may cause deterioration of breakdown of capacitors. Be sure to solder within the recommended temperature condition range.

### HAND SOLDERING

- a.) Soldering iron top temperature:  $\leq 350^{\circ}\text{C}$
- b.) Soldering time:  $\leq 3\text{sec}$

If re-work or dipping twice is necessary, it should be done after the capacitor returned to the normal temperature. Suggestion time is 24 hours.

THT film capacitors are not suitable for reflow soldering.

When SMD components are used together with film capacitor, the film capacitor should not pass into the SMD adhesive curing oven. The film capacitor should be assembled after the SMD process.

In order to ensure proper conditions for manual or selective soldering, the body (surface) temperature of the film capacitor ( $T_s$ ) must be  $\leq 120^{\circ}\text{C}$ .

## REVISION TABLE

| Revision | Date       | Status          | Notes               |
|----------|------------|-----------------|---------------------|
| 001      | 01/10/2021 | Initial release | Initial publication |
|          |            |                 |                     |
|          |            |                 |                     |
|          |            |                 |                     |
|          |            |                 |                     |
|          |            |                 |                     |

## DISCLAIMER

Except for the written expressed warranties, MGT does not implicitly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any MGT product.

All information and technical specifications made available by MGT are for guidance only and we reserve the right to change or modify them without prior notice. Unless expressly stated in writing by MGT, we reject any guarantees, obligations, or warranties.

All MGT products with the technical specifications described are suitable for use in certain applications. Operating, production, storage and environmental conditions can have a massive influence on the parameters mentioned in the data sheets, which cause the performance to vary over time.

It is subject to the user's duty of care to design and validate his products in such a way that appropriate measures are taken, such as protective circuits or redundant systems to ensure the safety standards required in the application.

MGT components are not designed or rated for use in life support, rescue, safety critical, military, or aerospace applications where failure or malfunction could result in property or environmental damage, serious injury or death. In the aforementioned cases, please contact us before using MGT products.

In principle, we reserve all rights and MGT's general terms and conditions apply. You can find them on our website [www.mgt.co.com](http://www.mgt.co.com).