



MTF-DEPO/DPMO[®]SERIES

Power Transformers

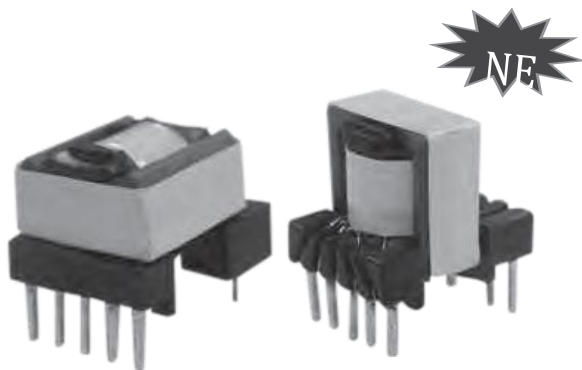

- Suitable for consumer product application
- Low leakage
- Low profile and high efficiency
- Operating Frequency : 50khz~100khz
- Operating temperature range : -40°C~+125°C
- RoHs compliance
- Halogen free available

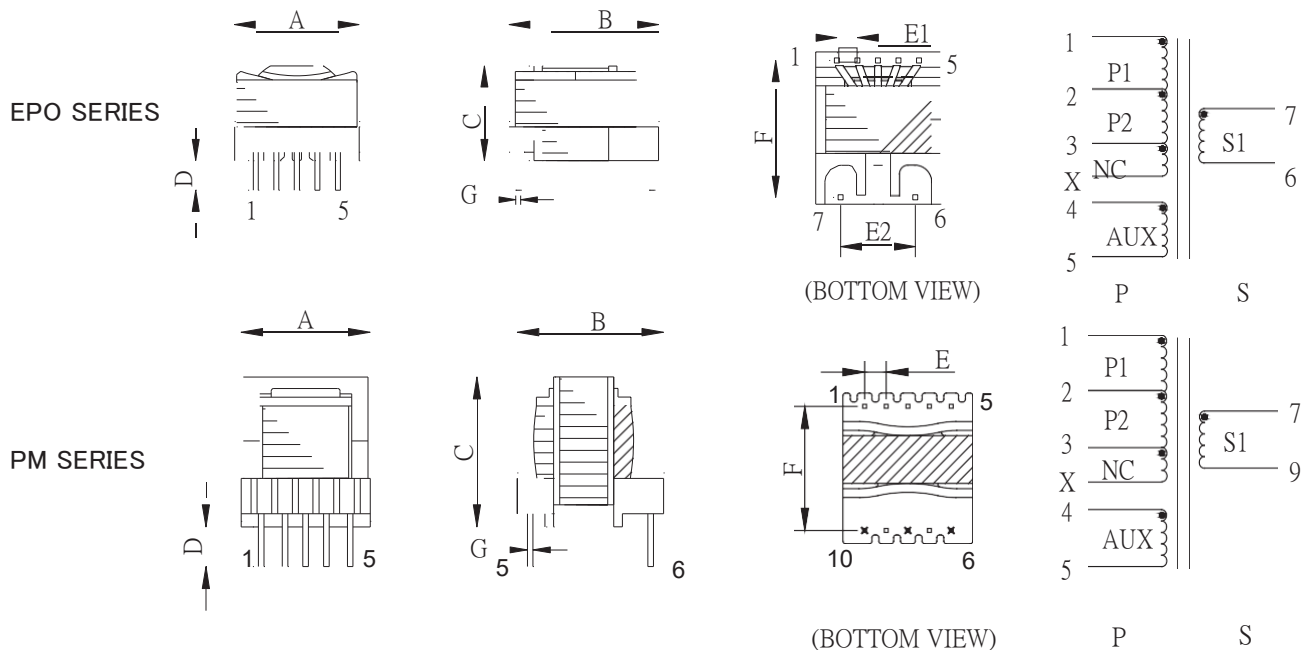

Part Number	b/n horizontal or vertical	DIMENSION unit: (mm)							ELECTRICAL SPECIFICATION		
		A (MAX)	B (MAX)	C (MAX)	D (±0.5)	E1/E2 (±0.3)	F (±0.5)	G (SQ)	Pw (PEAK) Watt	Lp (TYP) mH	HI-POT(Kvac) @3mA,2sec
MTF-DEPO12	H	14.5	18.5	12.5	3.5	2.5/7.8	14.5	0.6	5.2W	2.0±7%	3.6
MTF-DPM012	V	14.5	16.5	17.0	3.5	2.5	12.5	0.6	5.2W	2.0±7%	3.6
MTF-DEPO14	H	16.5	19.5	13.7	3.5	2.5/8.8	15.0	0.6	10.2W	1.0±6%	3.6
MTF-DPM014	V	16.5	18.2	18.5	3.5	2.5	14.0	0.6	10.2W	1.0±6%	3.6

NOTE:

1. TEST FREQUENCY @65KHZ / 1 Vrms

2. Δt=45°C approximately under the temperature rise current