MTI-T3622A SERIES


Inductors





- Automotive applications
- Industrial applicationsQualified to AEC-Q200

- RoHs compliant The base meets UL94 V-0 flammability.
- Operating Temperature -40°C to +125°C

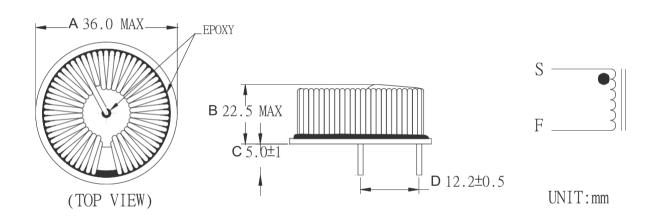

| Part Number | Inductance at 0A ±12% (uH) | Inductance at 8A | DCR max (mΩ) |
|---------------|-------------------------------|---------------------|--------------|
| MTI T3622A 01 | 46 | 30 Ou⊟ MIN | 21.0 |

1. Inductance is measured at 100kHz, 0.5Vrms. 2. Electrical specifications is measured at 25°C.

