




MTI-T4220A

Inductors

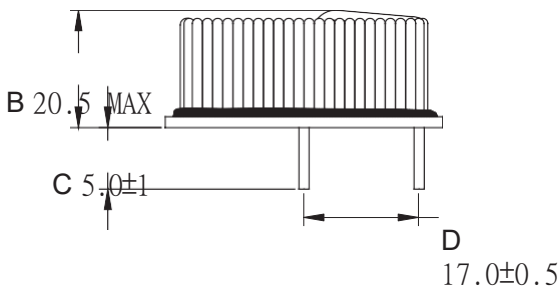

-
- Automotive applications
- Industrial applications
- Qualified for AEC-Q200
- RoHS compliant
- RoHS compliant UL94 V-0 flammability.
-
- Operating Temperature -40°C to +125°C.

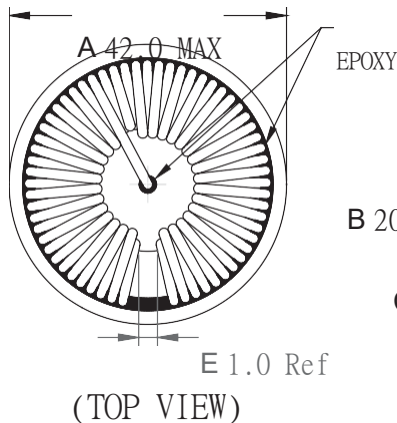

Part Number	Inductance at 0A ±12% (uH)	Inductance at 8A	DCR max (mΩ)
MTI-T4220A-01	70	50.0uH MIN	26.9
MTI-T4220A-02	94	70.0uH MIN	32.0
MTI-T4220A-03	128	90.0uH MIN	31.4

2. Electrical specifications is measured at 25°C.
1. Inductance is measured at 100kHz, 0.5Vrms.